

SECTION 01 14 19 – RESTRICTION TO USE OF SITE AREAS

PART 1 - GENERAL

1.1 SUMMARY

- A. Contractor’s use of specific Site Areas shall comply with the Contract Documents unless authorized otherwise by the TJPA Representative.

1.2 DEFINITIONS

- A. Site Area: All site and staging areas and locations as indicated on the Contract Drawings available to the Contractor for use to perform construction activities, including but not limited to the construction of structures, staging of operations, and laydown/stockpiling of equipment and materials.

1.3 GENERAL REQUIREMENTS


- A. Contractor shall place rubbish and debris in suitable containers daily to avoid accumulation at the Site Area. All rubbish and debris shall be completely removed and legally disposed of off-site prior to completion of each section of the Site Area.
- B. At no time shall the Contractor place, store, or stockpile construction rubbish, debris, equipment, materials, or the like in such a way as to block an adjacent building’s ingress or egress.
- C. Contractor shall completely remove offsite all materials and equipment, except those materials indicated to be incorporated into the construction, prior to vacating a Site Area.
- D. Contractor shall sequence operations to minimize impacts and disruption to the public. Contractor shall conduct its operations in a manner that would minimize the risk of damage in the Site Area.

1.4 CONTRACTOR’S USE OF STAGING SITE AREA

- A. The dates adjacent Site Areas are available for the Contractor’s use are specified below.

| Staging Area | Beginning | End |
|------------------|-----------|--|
| Parcel A/A' | 4/30/2013 | Completion of ramp construction |
| Parcel C" | 6/1/2011 | Limited to an area of 100' x 200' Allow San Francisco Office of Community Investment and Infrastructure (OCII) access for pre-construction investigations, such as geotech borings; OCII developer will assume control of site in the next 3 to 6 years |
| Parcel F | 6/1/2011 | Completion of ramp construction |
| Parcel G | 4/30/13 | Completion of ramp construction |
| Parcel H' | 4/30/13 | Completion of ramp construction |
| Parcel I/I" | 4/30/13 | Completion of ramp construction |
| Parcel M | 12/1/2010 | Completion of ramp construction (may be shared with other TJPA users) |
| Parcels N, N' | 6/1/2011 | Completion of Transit Center construction |
| Parcel P, P', P" | 11/1/2010 | Allow OCII access for pre-construction investigations, such as geotech borings; OCII developer will assume control of site for construction ~mid 2013 |

| Staging Area | Beginning | End |
|---------------------|------------------|--|
| Parcel S | 6/1/2011 | Allow OCII access for pre-construction investigations, such as geotech borings; OCII developer will assume control of site in the next 3 to 6 years |
| Caltrans | TBD | Use of Caltrans substation area subject to issuance of encroachment permits by Caltrans |
| 546 Howard | 6/1/2011 | Completion of ramp construction |
| 564 Howard | 6/1/2011 | Completion of ramp construction |
| 568 Howard | 4/30/2013 | Completion of ramp construction |
| 75 Natoma | 6/1/2011 | Completion of ramp construction |
| 77-79 Natoma | 6/1/2011 | Completion of ramp construction |
| 81-83 Natoma | 6/1/2011 | Completion of ramp construction |
| 85 Natoma | 4/30/2013 | Completion of ramp construction |

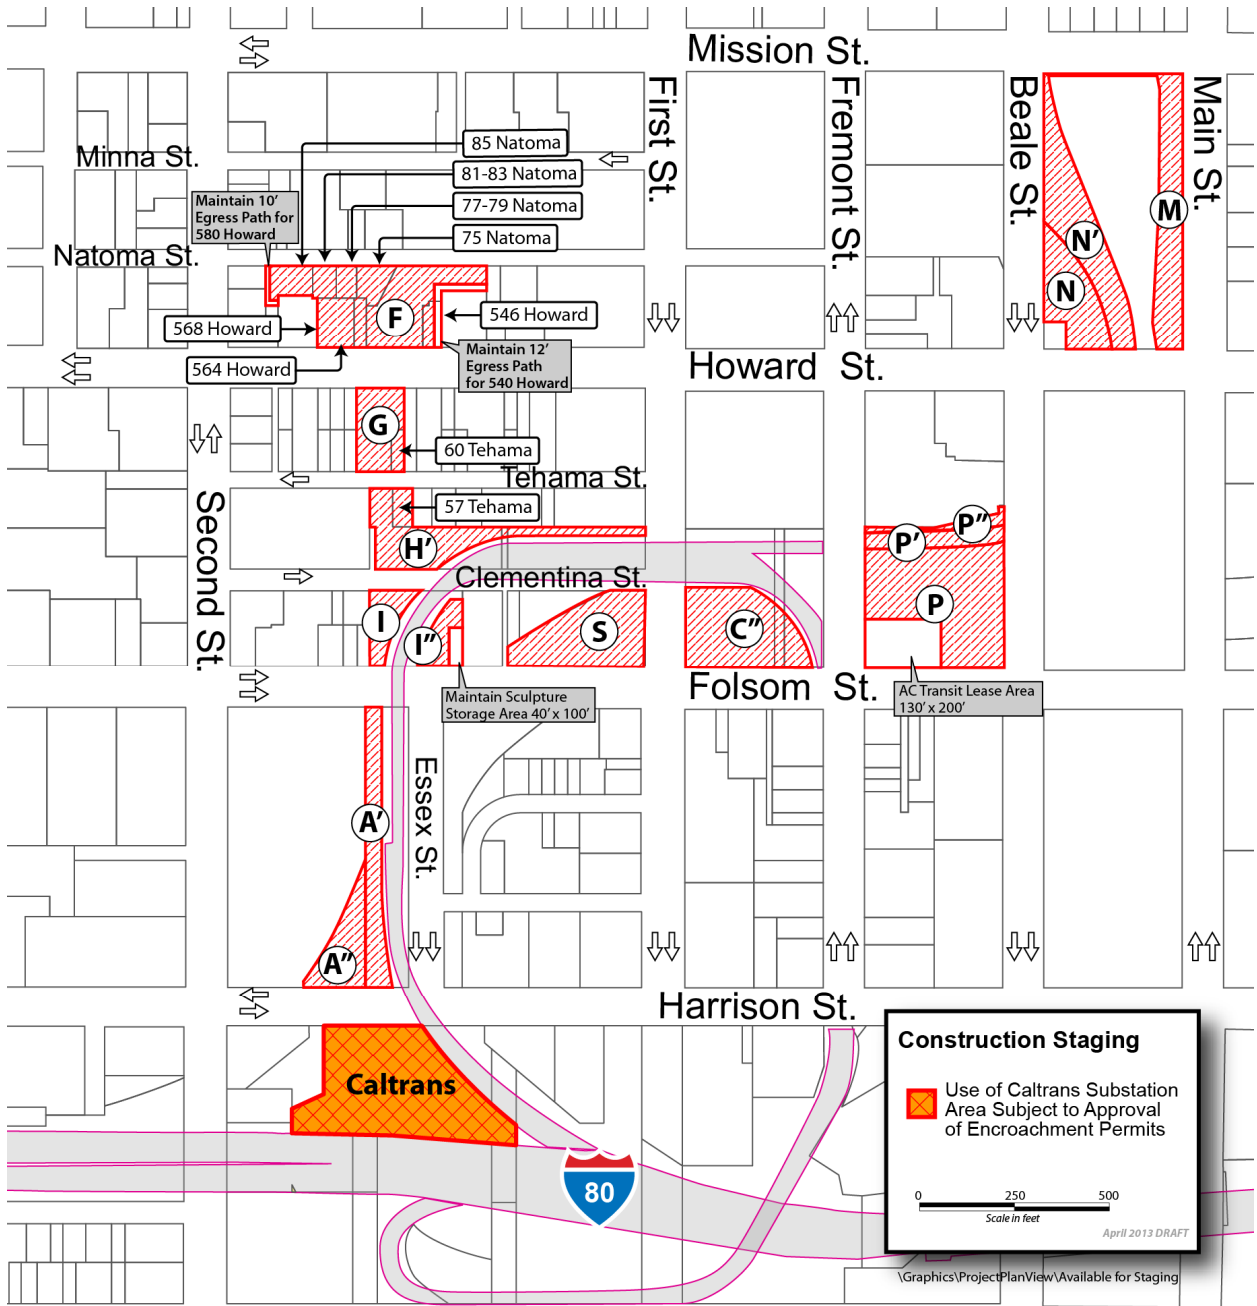

END OF SECTION 01 14 19

SPECIFICATION ISSUE LOG

| Revision | Date |
|----------|--------------------|
| 0 | July 30, 2010 |
| 1 | September 23, 2010 |
| 2 | May 21, 2013 |